

BEKT-S1502CII



New KT LCD 8.4 inch color touch screen display is larger, providing improved visibility and easier operation.



New tensioner system provides better and easier thread tensioning and improved thread break accuracy.



New trimmer system along with smaller diameter cylinder arm allows for sewing deeper into confined areas.

■ Name Drop

Separates names in a multiple name design for view and sewing purposes.



■ Frame Centering Function

■ Frame Limit Function


Able to restrict machine operation when a design does not fit to the frame or when there is a risk of a needle bar hitting the frame.

■ Shortcuts

Customize most-used icons to save time.

■ LAN Connector Standard, 2 USB ports

■ 70 million stitch capacity, 100 memory locations.

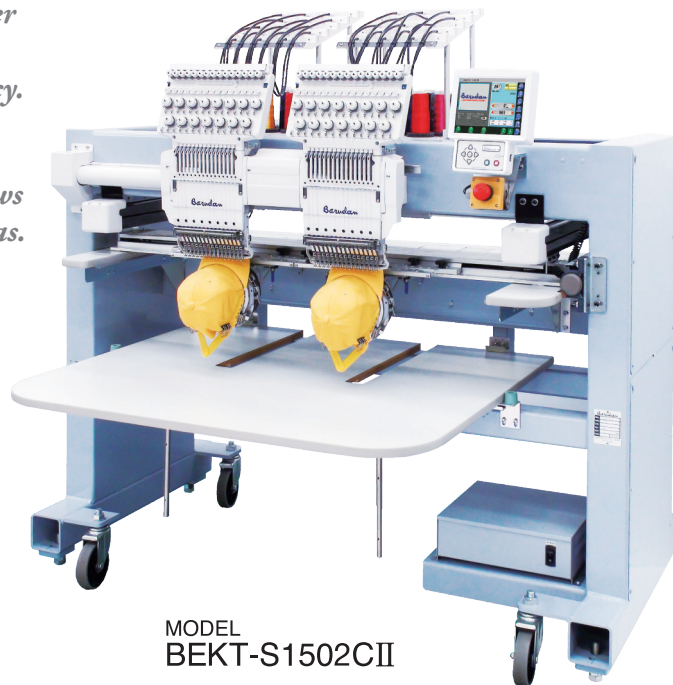

MODEL
BEKT-S1502CII



■ Machine Specifications / Main Dimensions

MODEL	Embroidery Area (mm)	Cap Frame (mm)	Number of Needles	Stitch Length (mm)	Speed (rpm)	Power Supply (v)	Power Consumption (kw)	Dimensions (mm)		
								L	W	H
BEKT-S1502CII	450×380	79×360	15	0.1~12.7	(Frames for Finished goods) 200~1100 (Tubular Frame & Cap Frame) 200~1000	1 φ 100~240	0.225	1625	1245	1610


Note 1 : The embroidery area indicated above allows for maximum pantograph movement.
The frame used may restrict the actual embroidery field size.

Note 2 : Machines and Specifications are subject to change at any time without prior notice.

【Standard】

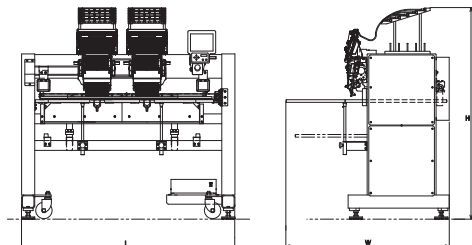

【Option】

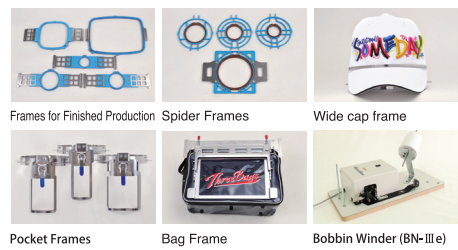

BARUDAN CO., LTD.



■ Sales Headquarter

20 Tsukagoshi, Josuiji, Ichinomiya-city, Aichi-pref.,
491-0004 Japan
Phone +81 586-76-1137
Fax +81-586-77-1499
URL <http://www.barudan.co.jp/>
E-mail info@barudan.co.jp

Agent:

We reserve the right to change specifications without notice for the purpose of product improvement.

2021-08

Barudan
THE MOST ADVANCED EMBROIDERY MACHINE SINCE 1959